

NovoProof®DA-SK

the self-adhesive sealing sheet

Our self-adhesive sealing sheets easily manage the sealing of all flat roofs based on wooden, concrete or corrugated sheet. NovoProof®DA-SK is ideal for new buildings as well as refurbishments with additional thermal insulation, and also particularly suitable for special roof types such as barrel, shed and pent roofs, for example.

Specifically developed for direct laying on


- unlined polystyrene hard foam (EPS)
- laminated polyurethane hard foam (PUR/PIR)

Technical Data

This innovation by SaarGummi Construction combines all the advantages of the NovoProof® product family. It will remain flexible from -40°C to +120°C, is root-proof, long-lasting and environmentally compatible.

The decisive difference: NovoProof® DA-SK sheets can be laid directly on unlined polystyrene hard foam and also be used where extensive mechanical attachment or laying with superimposed loads is impossible.

Material	EPDM rubber
Colour	Black
Nominal thickness	1,3 mm
Width	1.3 m with ThermoFast® welding edge along both longitudinal sides
	0,65 m with ThermoFast® welding edge along one longitudinal side
Length	15 m
Weight	Grammage ca. 2,100 g/m ² Roll weight ca. 41 kg

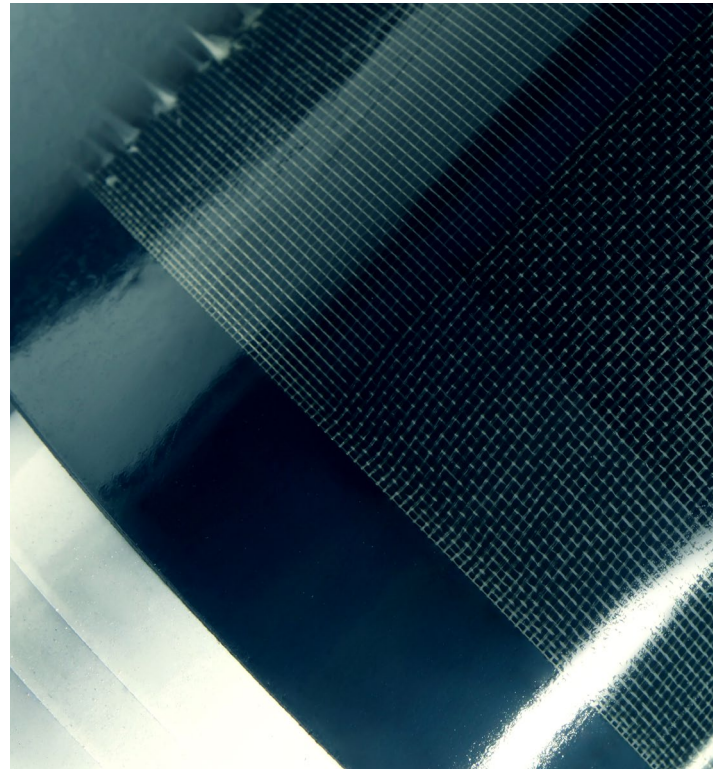

Product features

NovoProof® DA-SK has a slim sheet structure made from EPDM, glass fabric and the full-area self-adhesive layer.

With only 2.1 kg/m², it has a particularly low grammage, and thanks to the solvent-free gluing system, the product also sustainably contributes to environmental protection.

- 100% ozone- and UV-resistant
- Bitumen-compatible
- Contains no halogen or heavy metals
- Fire class E as per DIN EN 13501-1
Resistant to flying sparks and radiating heat (hard roofing) as per DIN CEN/TS 1187, Broof (t1) for tested designs
- Vapour-diffusible and insulation-neutral
- Can remain in use for over 50 years